

## How To Contact Us

For nearly 60 years, OEM designers, maintenance and materials engineers around the world have trusted the Molykote® brand for performance and expertise to solve or prevent lubrication problems. Molykote solutions are available through a distributor network of more than 3,000 channel partners around the globe. To learn more about our extensive product and service offering, visit [www.molykote.com](http://www.molykote.com) or email [industrial@dowcorning.com](mailto:industrial@dowcorning.com).

### LIMITED WARRANTY INFORMATION - PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that Dow Corning's products are safe, effective, and fully satisfactory for the intended use. Suggestions of uses should not be taken as inducements to infringe any particular patent.

Dow Corning's sole warranty is that the product will meet the Dow Corning sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

*Dow Corning* and *Molykote* are registered trademarks of Dow Corning Corporation.


© 2004 Dow Corning Corporation. All rights reserved. Form No: 71-0250B-01

**DOW CORNING**



**MOLYKOTE**<sup>®</sup>  
FROM DOW CORNING

## Anti-Friction Coatings Selection Guide

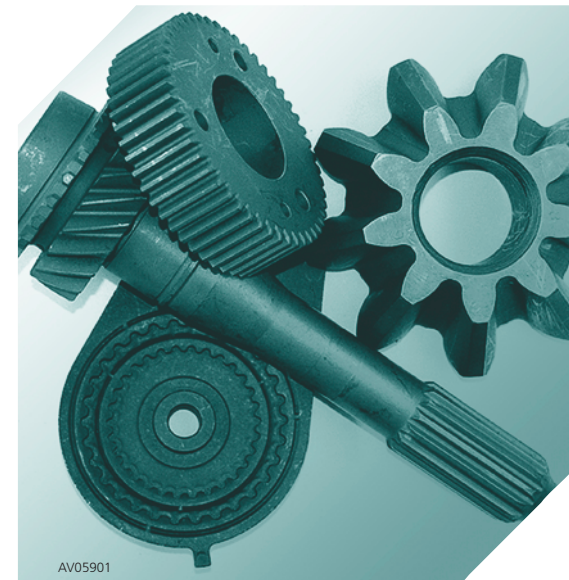

AV05901


## Resistance of cured film layer

Anti-Friction Coating product	Fuels	Brake fluid	Acids	Alkalines	Aromatics	Alcohols	Deionized Water	Ketone	Cutting fluids	Mineral oils	Synth. Oils	Dewatering fluids	Detergents	Radiation	Dielectric strength	Paintability
D 321R	●	●	●	✗	●	✗	✓	●	●	●	●	●	✗	✓	●	✗
3402-C	✓	✗	✗	✗	✓	●	✓	●	✓	✗	✗	✓	✗	✗	✗	✗
D 3484	✓	✓	✗	●	✓	✓	✓	✓	✓	✓	✓	✓	✗	-	●	✗
3400A Leadfree	✓	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓	✓
106	✓	✗	✗	●	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	●	✓
7409	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
7620	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
7400	✗	✗	●	●	●	✗	✗	●	✗	●	✗	✗	✗	-	-	✗
D 106	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	-	-	✓
PTFE-N UV	✗	✗	✗	✗	●	✓	✓	●	✗	✓	✗	✗	✓	-	✗	●
D 708	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	●
D 96	✗	●	●	●	●	✗	✗	●	-	✗	✗	-	-	-	✗	●
7405	✗	●	✗	●	✗	✓	✓	✓	✓	✓	✓	✗	✓	-	✓	●
D 10	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✗
D 88	✓	✓	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	-	-	✗

✓ = excellent ✗ = good ● = limited - = n.a.

## Application engineering

Our application facility is another strong asset of our technology leadership. In this dedicated laboratory area the most common application machines for Anti-Friction Coatings are in operation to produce prototype samples for customers, or for optimising the application parameters for new projects.

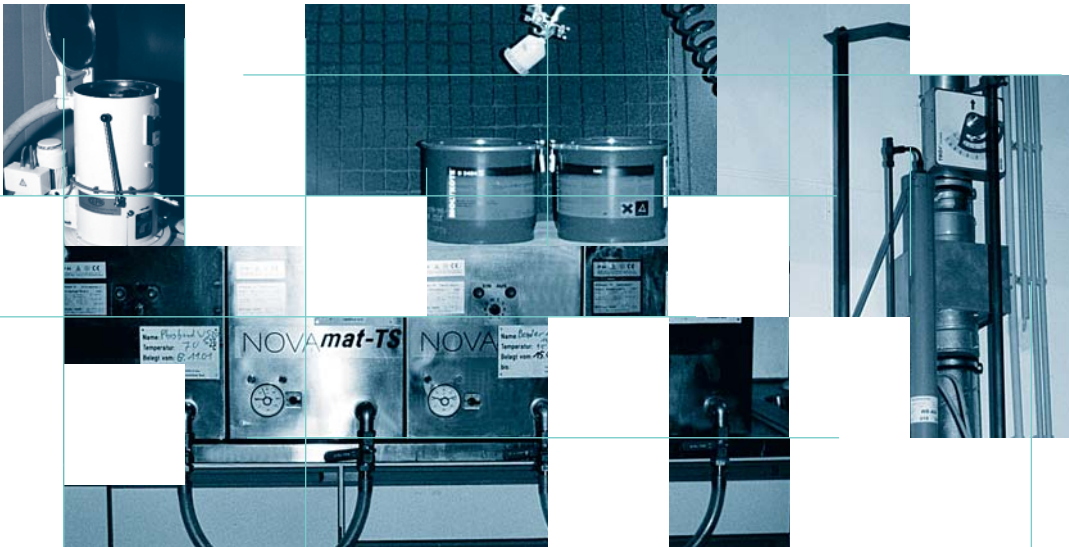

## MOLYKOTE® Anti-Friction

Anti-Friction Coatings (formerly known as bonded coatings) are paint-like products. They contain, instead of a colouring pigment, submicron-sized particles of solid lubricants dispersed through carefully selected resin blends and solvents.

Important for the lubricating and corrosion protection properties are the choice of the raw materials and the volume concentration of the lubricant content. MOLYKOTE®

Anti-Friction Coatings form a slippery film, which covers all surface roughness and thus optimises metal-to-metal, metal-to-plastic or plastic-to-plastic friction even under extreme loads and working conditions. These coatings can be applied by conventional painting techniques: spraying, dipping or brushing.

## MOLYKOTE® Product line

Product	Lubricant
D 321R	MoS <sub>2</sub>
3402-C	MoS <sub>2</sub>
D 3484	MoS <sub>2</sub>
3400A Leadfree	MoS <sub>2</sub>
106	MoS <sub>2</sub>
7409/7620	MoS <sub>2</sub>
D 106	MoS <sub>2</sub>
7400	MoS <sub>2</sub>
PTFE-N UV	PTFE
D 708	PTFE
D 96	PTFE
7405	Synth.
D 10	Graphite
D 88	Special pigments

### Footnote:

L13 is a mixture of organic solvents  
7414 is an organic solvent with  
flash-point >90°C

## Curing

Heat cured coatings exhibit better resistance values. The corresponding curing times and temperatures are given in the data sheets. These are guidelines, which need to be verified under production conditions. The curing time must be extended for large parts, depending on weight and cross-section. Paint drying circulation ovens are recommended. It is also possible to use infra-red heat for curing. A wipe test using MOLYKOTE® 7414 thinner is recommended as a check of complete curing. If the coating is removed, the film is not fully cured.

## Coating thickness

The film thickness has a considerable influence on the service life, coefficient of friction and anti-corrosion properties of Anti-Friction Coatings. It should be greater than the surface roughness of the mating surfaces and is generally between 5 and 20 µm. It is better to apply as thin a coat as possible to both surfaces, rather than a relatively thick coat on only one surface, since thicker layers cannot stand as heavy mechanical loads.

The following methods can be used to measure the layer thickness:

1. Magnetic method in accordance with DIN 50 981/ISO 2178 on ferromagnetic basic substances.
2. Eddy current method in accordance with DIN 50 984/ISO 2360 on non-ferrous metals.
3. Beta back-scatter method in accordance with DIN 50 983/ISO 3543 on plastics.
4. In exceptional cases (when the above methods are not available), micrometer and optical methods.

## Removal of Anti-Friction Coatings (stripping)

In most cases, Anti-Friction Coatings can be removed from metal surfaces by placing the parts in MOLYKOTE® 7414 thinner overnight. Should this fail to produce the desired result, commercial paint removers for epoxy resins can also be used. Another efficient method (if permitted) is sand-blasting the coated surfaces.

## Application to plastic surfaces Selection

When choosing the Anti-Friction Coating, bear in mind that coatings containing MoS<sub>2</sub> are suitable for reinforced plastics, and MoS<sub>2</sub>-free coatings for non-reinforced plastics. If a thermosetting Anti-Friction Coating is preferred to an air-drying Anti-Friction Coating, conduct a test beforehand to determine whether the plastic has sufficient thermal stability.

## Application methods

Anti-Friction Coatings can be applied by spraying, dipping, brushing, roll coating and printing. The chosen method will depend on the shape, size, weight and quantity of the components. Consideration must also be given to the film requirements, as well as to the proportion and location of the sliding surfaces being coated.

## Drying/curing

This depends on the coating used and can be obtained from the data sheets. Trial coating and testing for stress crack formation are required.

## Application of Anti-Friction Coatings (continued)

### Dipping individual components

Big bolts, bushings, rods, sections, tubes, etc. and in general flat parts which cannot be treated in a dip-centrifuge can be coated in a dipping bath, and then allowed to drip-dry. Use a controlled dipping action to prevent air from being dragged in. Adjust withdrawal speed to prevent tears and droplet formation and to regulate the desired film thickness. Circulate the contents of the dipping bath with a suitable pump and an overflow lip. When using Anti-Friction Coatings containing organic solvents, arrange an edge extractor directly above the maximum level. During a stoppage, cover dipping containers to minimize evaporation and prevent contamination.

### Brush application

Anti-Friction Coatings can also be brushed on. Even with fine-bristled brushes, the resulting film is often irregular. Consequently, consider alternative methods.

### Roll coating and printing

Anti-Friction Coatings can be applied with standard coil-coating machines, but simpler transfer roll coating methods can also be used. Silk-screen and pad printing techniques are used for partial application.

### Suitability for coating methods

AFC-Product	Centrifuging	Paint/ spraying drum	Automatic dipping	Automatic spraying	Brushing	Printing	Coil- coating
D 321R	✘	●	✓	✓	✓	●	-
3402-C	✘	✘	✓	✓	✓	✘	✓
D 3484	✘	✓	✘	✓	✘	●	✓
3400A Leadfree	✓	✓	✘	✓	✓	✘	✓
106	✘	✘	✘	✓	✘	●	✓
7409	✘	✓	✓	✓	✘	✘	✓
7620	✘	●	✓	●	✘	✓	✓
7400	✘	●	✘	✓	✓	●	●
D 106	✘	✘	✘	✓	✘	●	✓
PTFE-N UV	●	●	●	✓	✘	●	●
D 708	✓	✘	✓	✓	✘	✘	✓
D 96	✘	●	✘	✓	✘	✓	●
7405	✘	✘	✓	✘	✓	✓	✓
D 10	✘	✘	●	●	●	✓	✓
D 88	✘	✘	●	●	●	✓	✓

✓ = excellent

✘ = good

● = limited

## Coatings

Other common application methods are spraying drums, centrifuges, electro-static or automatic spraying, printing or roller coating followed by well-known methods of industrial drying and curing. The time required for these drying and curing methods is between 3 minutes air drying and 60 minutes oven curing.

### The Anti-Friction Coatings Product Line

The current product line can be differentiated by the various solid lubricants, binders and solvent bases contained in the formulations.

Binder	Thinner- compatible solvent
Titanate	L 13
Special	L 13
Phenolic	L 13
Epoxy	L 13
Epoxy	L 13
Polyamide-imide	7414
Epoxy	Water
Acrylic	Water
Acrylic	L 13
Epoxy	L 13
PU	Water
Polyamide-imide	7414
Polyamide-imide	7414
Polyamide-imide	7414



## Strengths/Potential weaknesses Technologies

### 1. Lubricating Substances

Type	Strengths
MoS <sub>2</sub> Molybdenum Disulfide	<ul style="list-style-type: none"> <li>+ High load carrying capacity</li> <li>+ Wide temperature range</li> <li>+ Paintable</li> <li>+ Excellent adhesion</li> <li>+ Low coefficient of friction at high loads</li> <li>+ Protects against fretting corrosion</li> <li>+ Increases lifetime (Synergism with graphite)</li> <li>+ Electrical insulator</li> </ul>
Graphite	<ul style="list-style-type: none"> <li>+ High temperature stability</li> <li>+ Separating effect (metal-forming)</li> <li>+ Good lubricant under humidity</li> </ul>
PTFE	<ul style="list-style-type: none"> <li>+ Colourless</li> <li>+ Separation effect</li> <li>+ Low coefficient of friction at low load</li> <li>+ Electrical insulator</li> <li>+ Good chemical resistance</li> </ul>
Synthetics	<ul style="list-style-type: none"> <li>+ Colourless / colourable</li> <li>+ Extreme low coefficient of friction at low loads (curing temperature)</li> <li>+ Good chemical resistance</li> <li>+ Good fretting corrosion protection</li> <li>+ Low curing temperature</li> <li>+ Electrical insulator</li> </ul>

## Application of Anti-Friction Coatings

Depending on the nature of the parts being treated and the surface finish required, Anti-Friction Coatings are applied by spraying, dipping, or by using paint/spraying drums and centrifuges. The components should be appropriately pre-treated. In the case of partial coating of the components, it is advisable to use masking stencils or removable protective film. These must be removed before curing. Anti-Friction Coatings are supplied ready for use according to the recommended application processes (see technical data sheet of the considered product). Before application they need to be stirred thoroughly in order to obtain a uniform fluid. Only in cases where the film thickness has to be below 5 µm, it is necessary to dilute, stirring thoroughly. When handling non-water-based Anti-Friction Coatings use only electric mixers with explosion-proof motors. When applying such coatings, always comply with local safety regulations for handling paints and varnishes.

### Application to metal surfaces

#### Spraying

Apply sprays in spray booths. If it is done elsewhere, good ventilation should be provided. The volatile solvents can be dangerous: no naked flame must be in the room. A round-jet spray gun with a 0.8 mm nozzle is recommended for small areas. The spraying pressure should be of the order of 2 to 5 bar. The distance between component and spray gun should be such that the product is still moist when it strikes the surface. Tears or droplets should not occur. If the spray gun is held too far away from the component, the product will dry before reaching the surface. This will prevent the formation of a uniform Anti-Friction Coatings and the film will appear rough.

It is far more important to work with extreme care when applying Anti-Friction Coatings than when painting or varnishing, since an extremely thin but uniform film has to be produced. In order to produce a thicker film, several coats of Anti-Friction Coatings can be sprayed on. Each successive coat should, however, be applied to the previous coat when this is almost dry.

When spraying, use only compressed air that is free of water and oil. To apply the resin and the solid lubricant uniformly, the product must be stirred, especially after long breaks. In addition to spraying with compressed air, an electrostatic process may also be used. Before the coating hardens, sprayed parts must be handled with great care to prevent damages. Anti-Friction Coatings should dry in air for at least 10 minutes before being touched.

#### Dipping and centrifuging

If the shape and size of the parts permit, a dipping process can be used. Dip-spinning with a centrifuge is economical for applying Anti-Friction Coatings to large numbers of bulk goods like screws, nuts and small parts. Always dip-spin twice.

1. Dipping; centrifuging; spreading on wire grids; drying
2. Repetition of 1 to cover defects (contact points).

The required film thickness can be reached regulating the rotational speed of the centrifuge by the given viscosity of the Anti-Friction Coatings.

## Surface pre-treatment of Anti-Friction Coatings (continued)

### Washing, drying and impregnation of surface film

- Chromic acid process: rinse thoroughly in hot water (65°C); allow to air dry.
- Sulphuric acid process: wash parts thoroughly in water and seal coating in a 5% sodium dichromate or potassium dichromate solution by dipping. Rinse and allow to dry. The temperature during drying should not exceed 102°C. The component must not be touched with the bare hand thereafter.

### Acid dip for copper and copper alloys instead of sandblasting

Copper and copper alloys are treated with a mixture of two or more of the following acids: sulphuric, phosphoric, chromic, nitric and hydrochloric acids. The mixing ratios and concentrations will vary greatly, depending on the alloy and surface conditions. Dipping times range from 5 seconds to 5 minutes. When pickling, take care that the basic metal is not attacked unnecessarily. When using nitric acid, toxic nitric oxide fumes must be removed by good ventilation. A quick-acting pickling bath can be used for flat components. For a large number of components or parts with complicated shapes, use a slow-acting bath. Follow any pickling with a thorough rinsing to remove any acid residue.

## Pre-Treatment methods

	Steel	Galvanised parts	Aluminium alloy	Copper alloy	Magnesium alloy	Titanium alloy	High-grade steel
<b>Pre-treatment</b>							
Degreasing	x	x	x	x	x	x	x
Removal of oxides:							
- by pickling				x			x
- by sandblasting with aluminium oxide or cast-steel 55 µm	x		x	x		x	
Anodising to							
MIL-A-8625 C			x				
AMS 2488 (Ti-oxide Typ II)						x	
Bichromate treatment to MIL-M-3171 C					x		
Phosphating to DOD-P-16 232	x	x					
Oxalic acid treatment							x

Recommended pre-treatment methods for metal surfaces

### Pre-treatment of plastic surfaces

With plastics too, surface pre-treatment increases the adhesion and service life of Anti-Friction Coatings. This is done primarily by degreasing and cleaning. Use only solvents that will not damage the substrate. Review relevant information supplied by the manufacturer of the plastic or plastic part. Adhesion can also be improved by roughening (e.g. fine sandblasting) or by activating the plastic surfaces in a low-pressure plasma. Before production starts, test the effectiveness of the chosen pre-treatment.

## of Anti-Friction Coatings

### Potential weaknesses

- High friction at low loads
- Running-in at high loads
- High coefficient of friction under humidity
- Dark grey colour only

- Lower service life at room temperature (when compared to MoS<sub>2</sub>)
- Electrically conductive
- Black colour only

- Decomposition (+315°C)= toxic vapour
- Low load carrying capacity
- Not paintable

- Low load carrying capacity
- Limited temperature range

## Strengths/Potential weaknesses of Technologies (continued)

### 2. Binders

Type	Chemical Resistance	Temp. Resistance	Air Curing
Epoxy	+++	+++	-
Polyamide	+++	+++	-
Phenolic	++	+++	-
Acrylic	++	++	+++
Titanate	-	++++	+++

### 3. Solvents

Type	Flash Point
Water	-
7414	+ 93 °C
L13	+ 27 °C

## General differences to other types (in view of possibly replacing them)

### *Anti-Friction Coatings usually provide the following advantages compared to greases and pastes:*

- Dry and clean lubrication, not affected by dust, dirt and humidity
- Lifetime lubrication in most cases
- Localized lubrication
- No aging, evaporation, oxidation
- Non flammable, dry film
- Can be applied in a film of controlled thickness
- Can often replace burnishing, hard chrome, lead plating, cadmium and galvanizing
- Fully effective even after prolonged shut down
- Vacuum and radiation resistant

### *Phosphating*

Phosphating is suitable for pretreating iron and steel, not stainless steel, and for galvanised iron parts. Manganese phosphating increases the load carrying capacity of the coating. Zinc phosphating increases its corrosion protection. Only use phosphating baths which produce very fine crystalline layers. The process should produce a maximum dimensional deposition between 3 and 8 µm at the surface. This is equivalent to an increase in weight between 5 to 15 g/m<sup>2</sup>.

The phosphate layer should have an even, uniform structure and its colour should range between grey and black. The components should not be speckled and, in particular, should exhibit neither specks of dried-on phosphating solution nor traces of corrosion. After treatment, parts should not be touched with bare hands.

Parts exhibiting a slightly irregular colour may be used. The Anti-Friction Coatings must be applied to the phosphated metal parts within 24 hours, otherwise corrosion may occur.

### *Oxalic acid treatment of stainless steel*

Special oxalic acid baths are required because of the corrosion resistance of stainless steels. The operating instructions of the manufacturer concerned should be observed.

### *Sandblasting (after degreasing)*

Sandblasting is recommended for parts made of steel, titanium, aluminium, copper, magnesium and their alloys. Aluminium oxide or cast-steel (grain size 55 µm) are most suitable for this purpose. It will produce an average surface roughness Ra between 0.5 and 1.0 µm. In most applications the dimensional change produced by sandblasting is of little significance, being less than 1.3 µm.

Remove adhering sand particles with dry, oil-free compressed air. To avoid corrosion, treated surfaces must not be touched with the bare hand and coated as soon as possible.

### *Anodic oxidation (anodizing) of aluminium and aluminium alloys*

Aluminium and aluminium alloys should be pretreated by electrolytic oxidation. Alloys with a copper content of 0.5% or more or with a total content of alloying additions in excess of 7.5% must be treated in a sulphuric acid bath.

All other aluminium alloys and aluminium can be treated in a chromic acid bath. A chromic acid bath produces a thin surface film that ensures good corrosion protection. For a good surface film to develop, use water of high purity (low chloride and sulphate content) for all baths.


	Minimum weight of surface film	Thickness of coating
Chromic acid process	2,15 g/m <sup>2</sup>	2,5 µm
Sulphuric acid process	6,50 g/m <sup>2</sup>	5,0 µm

## Surface pre-treatment of Anti-Friction Coatings

### Pre-treatment of metal surfaces

The adhesion and service life of Anti-Friction Coatings are greatly affected by the surface pre-treatment of components.

### Life of Anti-Friction Coatings

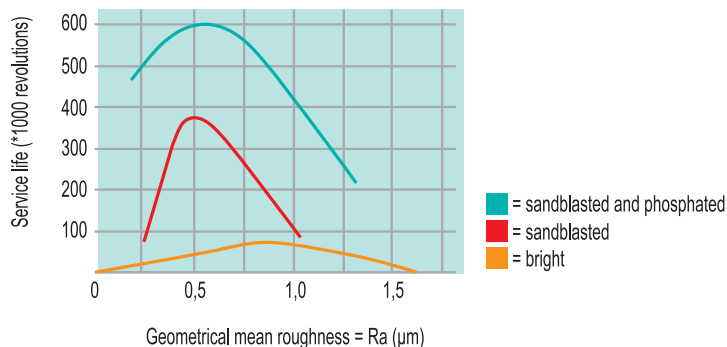

Effect of pre-treatment and surface roughness on the service life of Anti-Friction Coatings

### Degreasing

In order to achieve a uniform surface pre-treatment and satisfactory application of Anti-Friction Coatings, the components must first be degreased carefully. Even when corrosion is removed with acid, a thorough degreasing is necessary to achieve an even wetting in the bath.

Degreasing is particularly successful using organic solvents or ultrasonic cleaners and wash plant with alkaline aqueous agents. Because of toxicological and safety concerns, however, consider to using organic solvents with very low-aromatic content.

If steam degreasing equipment is not available, remove oil and grease residues by washing in a suitable solvent. The solvent should leave no residue after evaporation, e.g. acetone or white spirit. Repeat the washing operation several times using fresh solvent each time.

### Pre-treatment of corroded surfaces

Pretreat corroded surfaces by mechanical or chemical methods. As a mechanical method, sandblasting with aluminium oxide or with cast-steel (grain size 55 µm) is recommended. This produces an additional roughening of the component surface and provides better adhesion of the Anti-Friction Coatings. The acid and alkali treatments customary in electroplating are generally adequate. Baths should remove corrosion products but not unnecessarily attack the basic metal. Remove all traces of chemicals or solutions used in cleaning. Do not handle parts with bare hands.

## Anti-Friction Coatings

Corrosion Resistance	Remarks
+++	High hardness, water-based feasible
++	Self lubricating/ difficult application
+	Water-based feasible
-	Water-based feasible
-	Limited film forming

Evaporation Curing Ranking	Remarks
8	Non toxic/ corrosion
7	Skin irritant
4	Smell


## of lubricants

### Potential limitations:


- Not recommended for high speed applications
- Under hydrodynamic conditions should only be used in combination with grease, oil, paste (they provide running-in aid and emergency lubrication)
- Comprehensive application process




## Operating principles and conditions of Anti-Friction Coatings



1. Hydrodynamic lubrication





2. Boundary and mixed friction states



3. Mixed friction state plus Anti-Friction Coatings


Anti-Friction Coatings are particularly effective in frictional states of boundary friction and mixed friction as illustrated in the Stribeck diagram (see below). In these two conditions a fluid hydrodynamic lubrication can not be realized and direct metal-to-metal contact and wear take place; the solid lubricants are kept on the surface by the bonding force of the resin package; in this way the surfaces are always separated by an effective dry film, also in conditions of very low speeds, oscillating movements and high loads.

Anti-Friction Coatings can also effectively support hydrodynamic lubrication during running-in conditions and assuring emergency-running properties in case of break down of the hydrodynamic film.

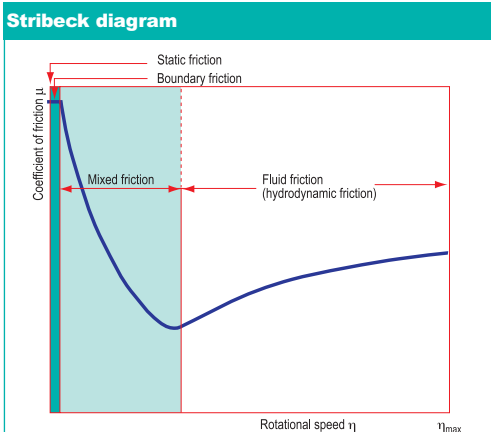

### Salt spray test

- DIN 50021 – ASTM B 117
- Coated specimen or original parts are put in a chamber with salt water spray
- Test criteria: rust formation
- Measured properties: corrosion resistance

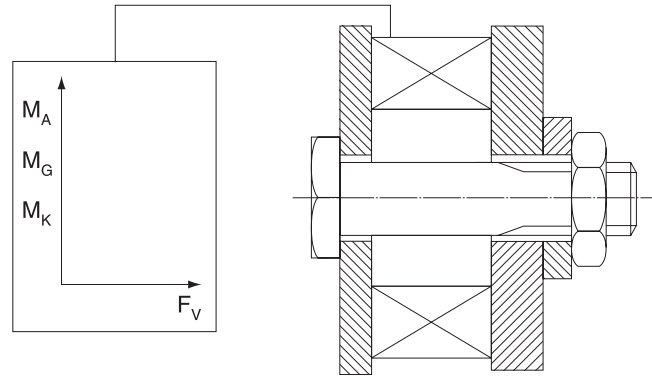

### Erichsen Test Machine


- Test equipment to measure the coefficient of friction on bolted connections at room temperature
- Type of contact: area (thread and underhead)
- Type of friction: sliding friction
- Test criteria: pretensioning force, tightening torque
- Measured properties: coefficient of friction on thread and underhead

All these test equipments are currently in operation at our technical centres. Furthermore our test fields are equipped with special test machines based on original automotive or industrial machine elements to evaluate the tribological behaviours under different environmental conditions.

Based also on these capabilities we are confident to be able to offer to our customers the best solution to solve their dry lubrication problems.


## Typical testing methods for Anti-Friction Coatings

The performance characteristics of Anti-Friction Coatings can be evaluated on standard test machines which can simulate the different tribological contacts; by changing the different testing parameters the performance of the lubricant on several machine elements can be simulated. Sketches and description of the operating principles of the machines are reported here.




Falex LFW1 (Block on Ring Test Machine)

- ASTM D 2714
- A stationary block is loaded against a rotating or oscillating ring
- Type of contact: line or area
- Type of friction: sliding friction
- Test criteria: friction force, sliding distance, number of oscillations/revolutions
- Measured properties: endurance life, friction value, load carrying capacity




Falex Pin and Vee Test Machine

- ASTM D 2625
- Two stationary vee blocks are loaded against a rotating pin specimen
- Type of contact: 4 lines
- Type of friction: sliding friction
- Test criteria: weld load, friction torque
- Measured properties: extreme pressure, load carrying capacity, endurance life




SRV Test Machine

- DIN 51834
- A translatable oscillating ball or cylinder is loaded against a fixed flat disc specimen
- Type of contact: point (ball) or line (cylinder)
- Type of friction: sliding friction
- Test criteria: weld load, friction force, number of oscillations
- Measured properties: load carrying capacity, endurance life, friction value

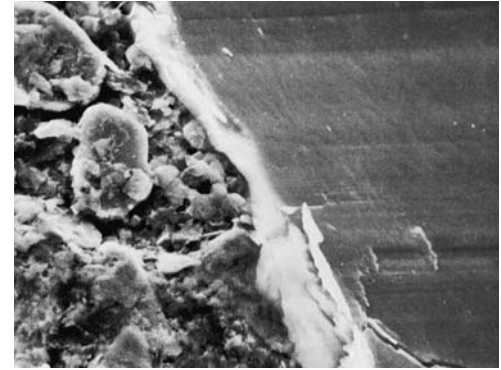

SEM photograph with 1000x magnification: MoS<sub>2</sub> Anti-Friction Coatings before (left) and after (right) load application

Applied Anti-Friction Coatings contain up to 70% solid lubricants. Solid lubricants with a lamellar structure like MoS<sub>2</sub> exhibit a floating effect in a wet film, whereby, as the film dries, they orient themselves horizontally and are deposited as individual layers. Under load, the structure of the film is further compacted producing an extremely smooth film surface covering the asperities of the carrier material.

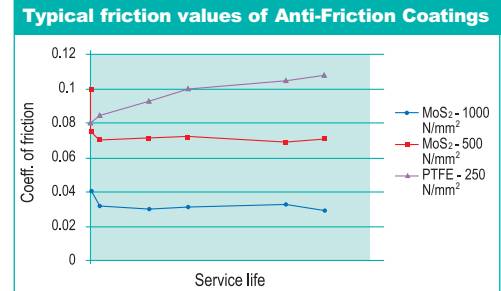

Typical friction values of MoS<sub>2</sub> and PTFE based Anti-Friction Coatings under different loads.

(Values measured with the LFW1 test machine - ASTM-D-2714 method)

"In the diagram the typical running-in effect of MoS<sub>2</sub> based, Anti-Friction Coatings can be noticed"

## Strengths/Potential weaknesses compared to

## ponents

Lubricant	MoS <sub>2</sub> AFC	PTFE AFC	Unsteady coefficient of friction	Short lubrication intervals	Contamination, chalking	Unsatisfactory surface quality	Short service life because of extreme temperatures	Lubrication failure because of chemical attack	Environmental application problems	Corrosion
Mineral-Oil grease	Sealing	Sealing								
	Noise reduction	Noise reduction								
	Load carrying	Temp. range	7405	D 3484	7405	D 321R	D 321R	7409	7400	3400A
	Temp. range	Adhesion	PTFE-N UV	3400A	7409	D 3484	7409	3400A	D 106	Leadfree
	Adhesion	Fretting corrosion		Leadfree	D 708	3400A	3400A	Leadfree		7409
	Fretting corrosion	Solid state friction				Leadfree	Leadfree	D 708		D 708
	Solid state friction	Chem. resistance						D 10		
	Chem. resistance	Separating effect								
Corrosion protection	Colourless									
	Corrosion protection		7405	106	7405	D 321R	3400A		7400	7409
Synthetic grease	Sealing	Sealing			7409	106	Leadfree		D 106	3400A
	Noise reduction	Noise reduction			D 708		D 321R			Leadfree
	Plastics compatibility						7409			D 708
	Load carrying	(Temp. range)								
	Temp. range	Adhesion								
	Adhesion	Fretting corrosion	7405	106	7405	D 321R	3400A	3400A	7400	7409
	Fretting corrosion	Solid state friction			7409	106	Leadfree	Leadfree	D 106	3400A
	Solid state friction	(Chem. resistance)					D 321R	7409		Leadfree
(Chem. resistance)	Separating effect					7409			D 708	
Corrosion protection	Colourless									
	Corrosion protection									
Silicone grease	Sealing	Sealing								
	Noise reduction	Noise reduction	D 321R	3400A	7409	D 321R	D 321R	7409	7400	7409
	Plastics compatibility		106	Leadfree		D 106	7409	3400A	D 106	3400A
	Load carrying	Load carrying	7405	106			3400A	Leadfree		Leadfree
	Temp. range	(Temp. range)		D 3484			Leadfree			D 708
	Adhesion	Adhesion								
	Fretting corrosion	Fretting corrosion								
	Solid state friction	Solid state friction								
Lower friction coeff.	Lower friction coeff. (Colourless)	7409	D 321R	7409	D 321R	D 321R	D 321R	7409	7409	
	Corrosion protection									
MoS <sub>2</sub> -paste	Corrosion protection	Corrosion protection								
	Adhesion	Adhesion	7409	7409	7409	3402-C	7409	7409		3400A
		Separating effect	D 708	3400A			3400A	D 708		Leadfree
	Colour		Leadfree			Leadfree			7409	D 708
Grease paste	Sealing	Sealing								
	Noise reduction	Noise reduction								
	Load carrying	Corrosion protection								
	Corrosion protection	Adhesion	7409	7409	7409	3400A	7409	7409	7409	7409
	Adhesion	Separating effect				Leadfree				
	Colourless									
			7405		7405	7405	D 321R	7405	7400	7405
			D 708		D 708		D 708	7405	7405	D 708
Thread paste	Sealing	Sealing								
	Easy application	Easy application								
	Adhesion	Adhesion								
	Corrosion protection	Corrosion protection	PTFE-N UV	D 96		D 96			D 96	
		Separating effect	D 96							
	Colourless									
			3402-C	3402-C	7409	D 321R	D 321R	7409	D 321R	7409
			7409	3400A		3402-C	3400A	3400A		3400A
				Leadfree			Leadfree	Leadfree		Leadfree
				7409			7409			
			7409	7409		3400A	7409	7409	7400	D 10
				D 10		Leadfree		D 10	7409	7409
				D 88				D 88	D 10	D 88

■ = Strengths of Anti-Friction Coatings □ = Strengths of other lubricants

# MOLYKOTE® Anti-Friction Coatings solutions for machine com

Solutions for	Running-in damages	Scuffing, scoring, seizure	High wear, pitting	Short service life because of high loads	Fretting corrosion	Stick-slip
<b>Machine components</b>						
Hinges, springs, locks, switches, bolts, safety belts, ski-bindings	D 321R	3400A Leadfree D 3484 7409 3402-C D 106	3400A Leadfree 7409 106	D 3484 3400A Leadfree D 106	106 7409	3400A Leadfree D 3484 7409 D 106
Brake parts, clutches, solenoids	D 321R 7400	D 106 7409 3400A Leadfree	D 106 7409	3400A Leadfree D 106 7409	106	D 106 7405 7409
Sleeve bearings, chain elements, self-aligning bearings, sintered metal bushings, bearings	D 321R	106 3400A Leadfree	106 7409	3400A Leadfree D 106 7409	106	D 321R 7409
Slides, spindles, bed ways, adjusting wedges, gear racks	D 321R	D 321R 106 D 106	3400A Leadfree 106 7409 D 106	D 321R 106 D 106	106	D 321R 106 D 106
Reactor parts lubrication	D 321R	D 321R	D 321R 7409	D 321R	7409	D 321R
Weapons, ammunition	3402-C	3402-C 7409 3400A Leadfree	3402-C 3400A Leadfree	3402-C 3400A Leadfree	3400A Leadfree 3402-C 7409	3402-C 3400A Leadfree D 708
Valves, carburettors, pumps	7409	7409	7409	7409	7409	7409
Nuts and bolts		D 708 7405		3402-C	3402-C	D 708 7405
Elastomer seals/profiles, plastic parts	D 96			D 96		D 96
Aircrafts, rockets, helicopters, space stations	D 321R	7409 3402-C	7409 3400A Leadfree 3402-C	3400A Leadfree 3402-C 7409	106 7409	3400A Leadfree 3402-C D 321 R
Pistons, hydraulic parts, cam shafts, gears	D 10 D 88 7409 7400	D 10 7409 D 88	7409 D 10 D 88	7409	7409	7409

## other lubricant types

Graphite AFC	Synth. AFC
Sealing	Sealing
Noise reduction	Noise reduction
Load carrying	Load carrying
Temp. range	Temp. range
Adhesion	Adhesion
Fretting corrosion	Fretting corrosion
Solid state friction	Solid state friction
Chem. resistance	Chem. resistance
Oil resistance	Separating effect
Solvent resistance	Colour
Sealing	Sealing
Noise reduction	Noise reduction
Plastics compatibility	
Load carrying	Load carrying
Temp. range	(Temp. range)
Adhesion	Adhesion
Fretting corrosion	Fretting corrosion
Solid state friction	Solid state friction
(Chem. resistance)	(Chem. resistance)
(Oil resistance)	Separating effect
(Solvent resistance)	Colour
Sealing	Sealing
Noise reduction	Noise reduction
Plastics compatibility	Plastics compatibility
Load carrying	Load carrying
Temp. range	Adhesion
Adhesion	Fretting corrosion
Fretting corrosion	Solid state friction
Solid state friction	Lower friction coeff.
(Chem. resistance)	Corrosion protection
(Oil resistance)	Colour
(Solvent resistance)	
Corrosion protection	Corrosion protection
Adhesion	Adhesion
	Separating effect
	Colour
Sealing	Sealing
Noise reduction	Noise reduction
Load carrying	Load carrying
Corrosion protection	Corrosion protection
Adhesion	Adhesion
Separating effect	Separating effect
Oil resistance	Colour
Solvent resistance	
Sealing	Sealing
Easy application	Easy application
Adhesion	Adhesion
Corrosion protection	Corrosion protection
Separating effect	Colourless
Oil resistance	Very low coeff. of friction
Solvent resistance	

Strengths/Potential weaknesses compared to other lubricant types

## Strengths comparison among PTFE and Synthetics-

PTFE-N UV	PTFE-N UV	D 708	Endurance life (LFW- 1 test, ASTM- D- 2714)		Fretting corrosion resistance (Deyber test) [oscillations]	Typical corrosion protection values (*) (ISO R 1456) [h]	Curing schedule [min/°C]	Flash point [°C]	Surface coverage m <sup>2</sup> /kg
			[Revolutions in thousands]	[Oscillations in thousands]					
PTFE-N UV	Colourless								
	Air drying								
	Aerosol								
	Load carrying capacity								
	Chemical resistance								
	Corrosion protection								
	Adhesion								
				s=480	s=210	14x10 <sup>6</sup>	-	5/20	+23
D 708	Load carrying capacity		s=150	s=15	5x10 <sup>6</sup>	p+sp=120	120/20	+12	15
	Chemical resistance		p=300	p=350	28x10 <sup>6</sup>	p+sp=24	10/170	+23	10
	Corrosion protection								
	Adhesion		p=100	p= > 50	7x10 <sup>6</sup>	p+sp=500 p+dp=240	30/200	< +21	15
	Colourless								
	Air drying		p=380	p=280	24x10 <sup>6</sup>	-	60/150	+24	15
	Aerosol		p=350	p=100	> 36x10 <sup>6</sup>	p+sp=300 p+dp=96	30/220	+28	12
D 96	Water-based	Colourless	p=400	p=100	> 36x10 <sup>6</sup>	p+sp=300	20/220	+28	14
	Low friction	Air drying							
		Water-based	p=200	p=100	9x10 <sup>6</sup>	-	40/20	None	16
	Temperature resistance	Temperature resistance	p=300	p=180	24x10 <sup>6</sup>	p+sp=24	60/200	+84	15
	Adhesion	Load carrying capacity							
	Aerosol	Chemical resistance	p=15	p=36	20x10 <sup>6</sup>	p+sp=24	120/20	-19	18
		Corrosion protection							
		Adhesion				p+sp=500 p+dp=360	20/200	0	18
7405	Load carrying capacity	Low friction	-	-	-	-	120/20	> +100	-
	Low friction	Higher flash point				p+sp=200			
	Chemical resistance								
	Corrosion protection		p=150	p=100	> 36x10 <sup>6</sup>	p+dp=96	60/120	+41	16
	Colourless	Chemical resistance							
	Air drying	Corrosion protection							
	Aerosol								
				p=6	p=1	> 36x10 <sup>6</sup>	-	30/180	+63
						p+sp=300 p+dp=120	20/210	+63	-

(\*): as the performance in corrosion resistance is affected by the geometry of the parts coated, by the pre-treatment of the surface, by the application method and by the thickness of the applied dry film, these values should be considered typical.

■ = strengths of the Anti-Friction Coatings in the row compared to the Anti-Friction Coatings in the column

□ = strengths of the Anti-Friction Coatings in the column compared to the Anti-Friction Coatings in the row



## Typical properties of MOLYKOTE® Anti-Friction Coatings based Anti-Friction Coatings

MOLYKOTE® Product	Solid Lubricant	Thinner - compatible solvent	Colour	Service temperature range [°C]	Load carrying capacity (Falex test, ASTM-D-2625) [N]	D 96		7405	
						Temperature resistance	Adhesion	Colourless	Air drying
D 321R	MoS <sub>2</sub>	L 13	grey	-180/+450	15.000	Aerosol	Water-based	Low friction	Chemical resistance
3402-C	MoS <sub>2</sub>	L 13	grey	-200/+315	15.500	Water-based	Low friction	Chemical resistance	Corrosion protection
D 3484	MoS <sub>2</sub>	L 13	grey	-70/+250	15.500	Low friction	Water-based	Chemical resistance	Corrosion protection
3400A Leadfree	MoS <sub>2</sub>	L 13	grey	-200/+430	20.000	Adhesion	Water-based	Chemical resistance	Corrosion protection
106	MoS <sub>2</sub>	L 13	grey	-70/+250	15.500	Colourless	Water-based	Low friction	Chemical resistance
7409	MoS <sub>2</sub>	7414	grey	-70/+380	15.800	Air drying	Water-based	Higher flash point	Chemical resistance
7620	MoS <sub>2</sub>	7414	grey	-70/+380	15.800	Water-based	Water-based	Chemical resistance	Corrosion protection
7400	MoS <sub>2</sub>	water	grey	-70/+200	13.000	Water-based	Water-based	Chemical resistance	Corrosion protection
D 106	MoS <sub>2</sub>	water	grey	-70/+250	13.500	Water-based	Water-based	Chemical resistance	Corrosion protection
PTFE-N UV	PTFE	L 13	transparent	-180/+240	4.000	Water-based	Water-based	Chemical resistance	Corrosion protection
D 708	PTFE	L 13	black	-180/+240	1.220	Water-based	Water-based	Chemical resistance	Corrosion protection
D 96	PTFE	water	transparent	-40/80	-	Water-based	Water-based	Chemical resistance	Corrosion protection
7405	Synt.	7414	yellowish transparent	-70/+200	15.000	Water-based	Water-based	Chemical resistance	Corrosion protection
D 10	Graphite	7414	black	-70/+380	13.600	Water-based	Water-based	Chemical resistance	Corrosion protection
D 88	Special	7414	silver-grey	-70/380	-	Water-based	Water-based	Chemical resistance	Corrosion protection

dp= application by dip-spinning – sp= application by spraying  
p= phosphated surface – s= sandblasted surface

## Strengths comparison among MoS<sub>2</sub> based Anti-Friction Coatings

	D 321R	D 3484	3400A Leadfree	3402-C	106	7409/7620	D 106	7400
<b>D 321R</b>		Temp. resistance Extreme load Aerosol Air curing	Low friction Air drying Aerosol Higher flash point	Temp. resistance Low friction Aerosol Higher flash point Non toxic	Temp. resistance Good adhesion Air drying Aerosol	Air drying Aerosol	Temp. resistance Air drying Aerosol	Temp. resistance Good adhesion Aerosol
		No chalking Chem. resistance Corr. protection	No chalking Corr. protection Chem. resistance	Corr. protection No chalking MIL-spec.	Chem. resistance No chalking	Chem. resistance Corr. protection No chalking	Corr. protection No chalking Water-based	Water-based No flash point
<b>D 3484</b>	No chalking Chem. resist. Corr. protection Temp. resistance Extreme load Aerosol Air curing		Low friction Fast curing Higher flash point Temp. resistance Corr. protection	Low friction Higher flash point Fast curing Temp. resistance Air drying MIL-spec.	Low friction Corr. protection Fast curing MIL-spec.	Fast curing Temp. resistance Chem. resistance Corr. protection	Low friction Fast curing Water-based	Temp. resistance Corr. protection Air drying Water-based No flash point
<b>3400A Leadfree</b>	Corr. protection Chem. resistance No chalking Low friction Air drying Aerosol Higher flash point	Temp. resistance Corr. protection		Temp. resistance Corr. protection Air drying	Temp. resistance Corr. protection	Temp. resistance Corr. protection Low friction Lower curing temp Higher flash point	Temp. resistance Chem. resistance Corr. protection Low friction Water-based	Temp. resistance Chem. resistance Corr. protection Low friction Air drying Water-based No flash point
<b>3402-C</b>	No chalking Corr. protection MIL-spec. Temp. resistance Low friction Aerosol Higher flash point Non toxic	Temp. resistance Air drying MIL-spec.	Air drying Temp. resistance Corr. protection	Temp. resistance Corr. protection MIL-spec. Low friction Higher flash point Non toxic	Temp. resistance Corr. protection Air drying MIL-spec. Low friction Higher flash point Non toxic	Air drying MIL-spec. Temp. resistance Low friction Chem. resistance Corr. protection Higher flash point Non toxic	Temp. resistance Air drying MIL-spec. Low friction Water-based Non toxic	Temp. resistance Chem. resistance Corr. protection MIL-spec. Low friction Water-based No flash point Non toxic
<b>106</b>	Chem. resistance No chalking Temp. resistance Good adhesion Air drying Aerosol	MIL-spec. Low friction Corr. protection Fast curing	Low friction Lower curing temp. Higher flash point Temp. resistance Corr. protection	Low friction Higher flash point Non toxic Temp. resistance Corr. protection Air drying MIL-spec.	Temp. resistance Chem. resistance Corr. protection	Lower curing temp. MIL-spec. Temp. resistance Chem. resistance Corr. protection	Storage stability Lower curing temp. MIL-spec. Corr. protection Water-based	Temp. resistance Chem. resistance MIL-spec. Air drying Water-based No flash point
<b>7409 / 7620</b>	Chem. resistance Corr. protection No chalking Air drying Aerosol	Temp. resistance Chem. resistance Corr. protection Fast curing	Low friction Chem. resistance Higher flash point Temp. resistance Corr. protection	Temp. resistance Low friction Chem. resistance Corr. protection Higher flash point Non toxic Air drying MIL-spec.	Temp. resistance Chem. resistance Corr. protection	Temp. resistance Chem. resistance Corr. protection Storage stability Water-based	Temp. resistance Chem. resistance Corr. protection Storage stability Water-based	Temp. resistance Chem. resistance Corr. protection Air drying Water-based No flash point
<b>D 106</b>	Corr. protection No chalking Water-based Temp. resistance Air drying Aerosol	Water-based Low friction Fast curing	Low friction Water-based Temp. resistance Chem. resistance Corr. protection	Low friction Water-based Non toxic Temp. resistance Air drying MIL-spec.	Corr. protection Water-based Storage stability Lower curing temp. MIL-spec.	Water-based Temp. resistance Chem. resistance Corr. protection Storage stability	Temp. resistance Corr. protection Chem. resistance No flash point	Temp. resistance Corr. protection Chem. resistance Air drying No flash point
<b>7400</b>	Water-based No flash point Temp. resistance Good adhesion Aerosol	Air drying Water-based No flash point Temp. resistance Corr. protection	Low friction Air drying Water-based No flash point Temp. resistance Chem. resistance Corr. protection	Low friction Water-based No flash point Non toxic Temp. resistance Chem. resistance Corr. protection MIL-spec.	Air drying Water-based No flash point Temp. resistance Chem. resistance MIL-spec.	Air drying Water-based No flash point Temp. resistance Chem. resistance Corr. protection	Air drying No flash point Temp. resistance Corr. protection Chem. resistance	

■ = strengths of the Anti-Friction Coatings in the row compared to Anti-Friction Coatings in the column

□ = strengths of the Anti-Friction Coatings in the column compared to Anti-Friction Coatings in the row

Welcome to the  
**MOLYKOTE®**  
*Anti-Friction Coatings*  
*Selection Guide*  
*from Dow Corning.*  
*In the following pages,*  
*you will find a complete*  
*overview of the Molykote*  
*Anti-Friction Coatings*  
*product range.*  
*It includes a variety of*  
*technical information*  
*that you will find helpful*  
*when selecting the*  
*right product for your*  
*specific application.*  
*If you cannot find*  
*the specific information*  
*you need, please*  
*contact your Molykote*  
*representative.*

**Page**

- 4** MOLYKOTE® Anti-Friction Coatings
- 6** Strengths/Potential weaknesses of Anti-Friction Coatings Technologies
- 8** Strengths/Potential weaknesses of Anti-Friction Coatings Technologies (continued)
- 8** General differences to other types of lubricants
- 10** Operating principle and conditions of Anti-Friction Coatings
- 12** Strengths/Potential weaknesses compared to other lubricant types
- 14** Strengths comparison among PTFE and Synthetics-based Anti-Friction Coatings
- 16** Strengths comparison among MoS<sub>2</sub> based Anti-Friction Coatings
- 18** Typical properties of Molykote® Anti-Friction Coatings
- 20** MOLYKOTE® Anti-Friction Coatings solutions for machine components
- 22** Typical testing methods for Anti-Friction Coatings
- 24** Surface pre-treatment of Anti-Friction Coatings
- 26** Surface pre-treatment of Anti-Friction Coatings (continued)
- 27** Application of Anti-Friction Coatings
- 28** Application of Anti-Friction Coatings (continued)
- 30** Application engineering + Application examples of Anti-Friction Coatings

**Application examples**




AV01643



AV5898



AV05999

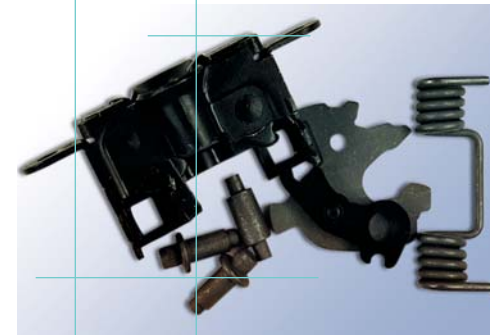

AV05998



AV05991